



PAGE DE CONNEXION

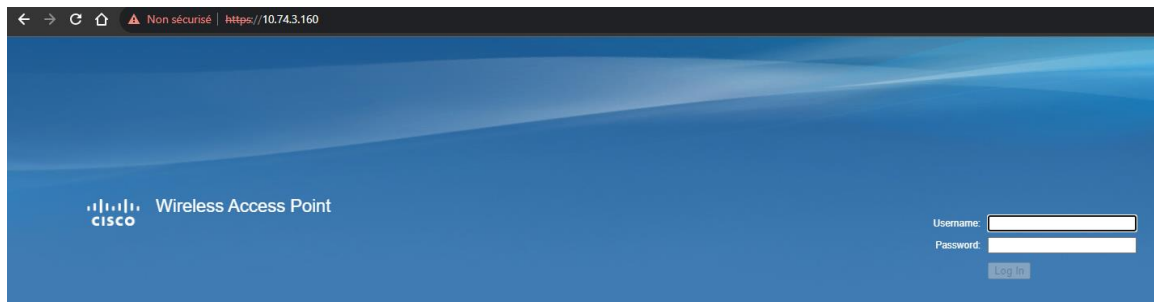


Aller dans Wireless > Radio > *Activer « Radio » *

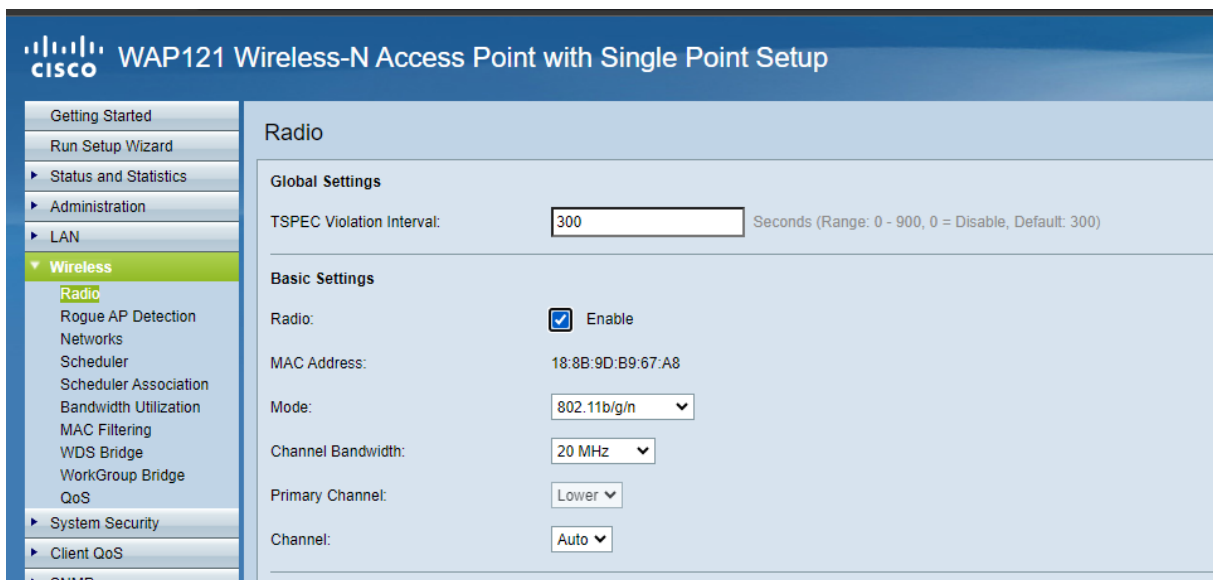

Appuyer sur « Save » en bas de la page

Aller dans Wireless > Networks

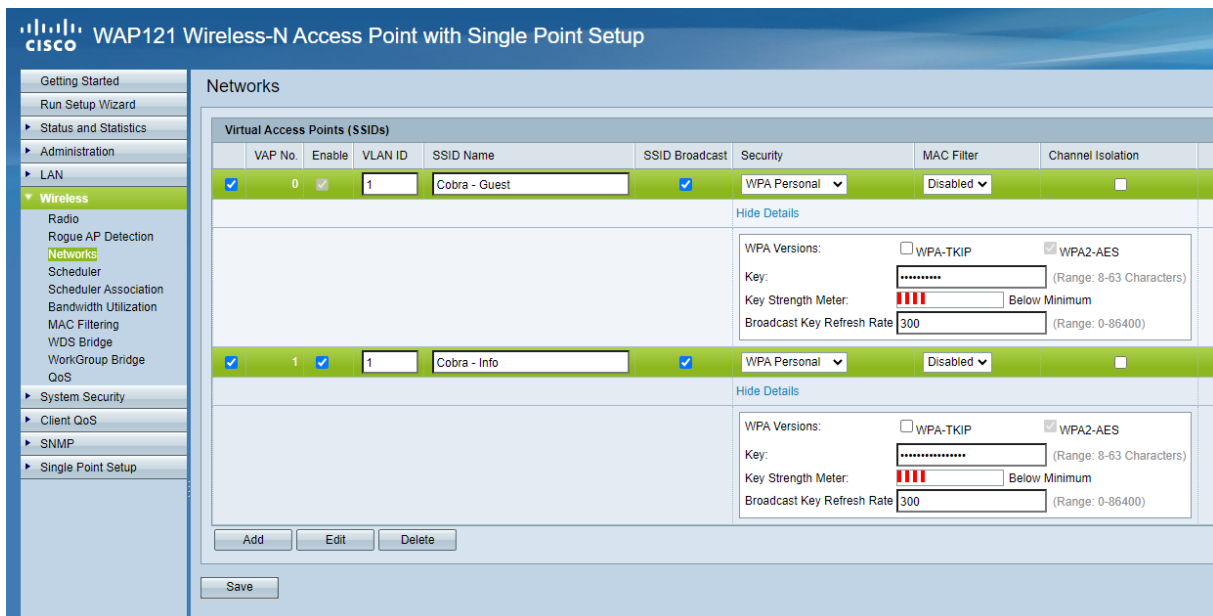

Appuyer sur « Save »

Aller dans LAN > VLAN and IPv4 Address

The screenshot shows the configuration interface for a Cisco WAP121. The left sidebar contains a navigation menu with the following items: Getting Started, Run Setup Wizard, Status and Statistics, Administration, LAN (expanded), Port Settings, VLAN and IPv4 Address (highlighted), IPv6 Addresses, Wireless, System Security, Client QoS, SNMP, and Single Point Setup. The main content area is titled 'VLAN and IPv4 Address' and is divided into two sections: 'Global Settings' and 'IPv4 Settings'. In the 'Global Settings' section, the MAC Address is 18:8B:9D:B9:67:A8. The 'Untagged VLAN' is enabled with a checked checkbox. The 'Untagged VLAN ID' and 'Management VLAN ID' are both set to 1. The 'IPv4 Settings' section shows 'Connection Type' set to 'Static IP' (selected with a radio button). The 'Static IP Address' is 10.74.1.103, the 'Subnet Mask' is 255.255.252.0, and the 'Default Gateway' is 10.74.0.1. The 'Domain Name Servers' are set to 'Manual' with the first server address being 10.74.0.1. A 'Save' button is located at the bottom of the configuration area.

Choisir l'IP souhaitée

Appuyer sur « Save »